
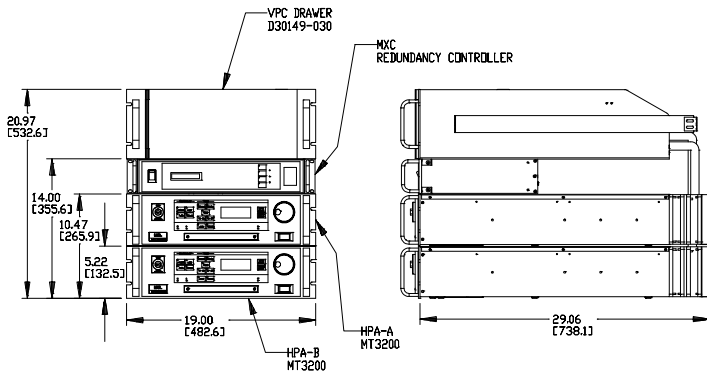


Variable Power Combined/Redundant Configuration



System Configuration

# MT32PC2

The MT32PC2 is a dual output/dual input phase combined redundant TWTA system. It is available in 400W in C-Band and 200W and 400W in Ku-Band. The MT32PC2 is designed for reliable commercial service in satellite communications ground station earth terminals.

MCL, Inc.  
 501 S. Woodcreek Road  
 Bolingbrook, IL 60440-4999, U.S.A.  
 (630) 759-9500 FAX: (630) 759-5018  
[www.mcl.com](http://www.mcl.com)

